

127 Adjustable Long Tee

Key clamp fitting for tubular handrails, barriers and frames

Tube sizes
34mm · 42mm · 48mm

An angled long tee, often used on stair rails of 30° to 45°.

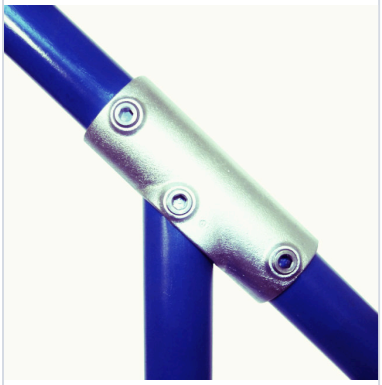

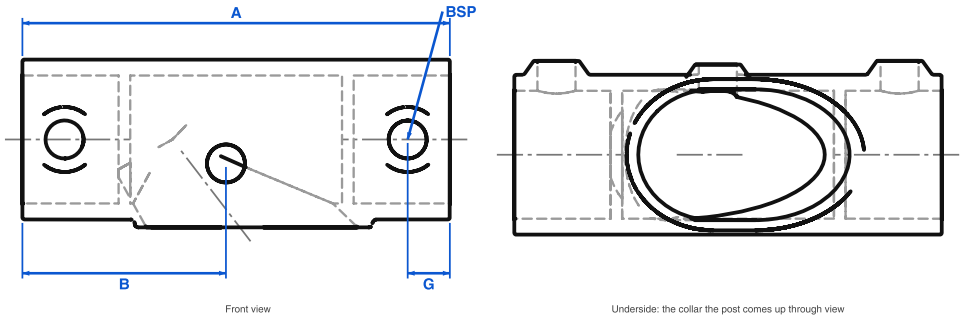

One drawing serves every size. Letters match the table below.

SIZES AND DATA

		34mm B34	42mm C42	48mm D48
Part number		**127-B34**	**127-C42**	**127-D48**
DIMENSIONS nominal, mm, as lettered on the drawing				
A	overall length of the barrel	119	147	164.5
B	one end of the barrel to the middle grub-screw axis	63.5	70	79
G	barrel end face to the nearer grub-screw axis	12.5	14.5	15
FIXING AND WEIGHT				
Grub screw	BSP thread × length, mm	1/4" × 12.5	3/8" × 12.7	3/8" × 12.7
Hex key	across flats	1/4" AF	5/16" AF	5/16" AF
OTHER MAKERS' PART NUMBERS for comparison				
Kee Klamp		27-6	27-7	27-8
FastClamp		C26G25	C26G32	C26G40
Alvin		A50 size 6	A50 size 7	A50 size 8
ORDERING				
Barcode	GTIN	5061091710310	5061091710327	5061091710334

Material: Malleable cast iron (ASTM A197) **Finish:** Hot-dip galvanised

Sizes and weights are nominal figures from the foundry's data. These are galvanised castings, so individual fittings vary and it is normal for one to measure or weigh a little differently. Check the fittings in your hand before cutting tube or drilling fixing holes. Not for use as building or construction scaffolding. The strength of a structure depends on the fittings, tube and fixings chosen and on what it is fixed to. Choosing the right size and type of fitting for the job is the customer's responsibility. If in doubt, ask us.