
134 Ground Socket

Key clamp fitting for tubular handrails, barriers and frames

Tube sizes
34mm · 42mm · 48mm

A ground socket cast into concrete, flush with the finished ground level. The upright is held by the grub screw and can be removed without leaving an obstruction.



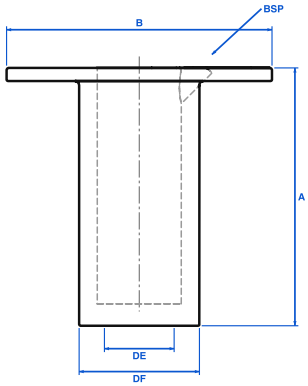

One drawing serves every size. Letters match the table below.

SIZES AND DATA

		34mm B34	42mm C42	48mm D48
Part number		**134-B34**	**134-C42**	**134-D48**
Fits tube	outside diameter, mm (nominal bore)	33.7 (1")	42.4 (1 1/4")	48.3 (1 1/2")
DIMENSIONS	nominal, mm, as lettered on the drawing			
A	overall depth, flange top (ground level) to the bottom of the socket	123	135	135
B	flange diameter	127	139	139
DE	opening in the bottom of the socket	25	36.5	38
DF	outside diameter of the socket body	50	63	67
FIXING AND WEIGHT				
Grub screw	BSP thread × length, mm	1/4" × 12.5	3/8" × 12.7	3/8" × 12.7
Hex key	across flats	1/4" AF	5/16" AF	5/16" AF
Weight	kg, approximate	1.85	2.46	2.47
OTHER MAKERS' PART NUMBERS	for comparison			
Kee Klamp		66-6	66-7	66-8
Interclamp		134-B34	134-C42	134-D48
Q Clamp		134-2	134-3	134-4
Tubeclamp		134B	134C	134D
FastClamp		C17G25	C17G32	C17G40
Alvin		A17 size 6	A17 size 7	A17 size 8
ORDERING				
Barcode	GTIN	5061091710600	5061091710617	5061091710624

Material: Malleable cast iron (ASTM A197) **Finish:** Hot-dip galvanised

Sizes and weights are nominal figures from the foundry's data. These are galvanised castings, so individual fittings vary and it is normal for one to measure or weigh a little differently. Check the fittings in your hand before cutting tube or drilling fixing holes. Not for use as building or construction scaffolding. The strength of a structure depends on the fittings, tube and fixings chosen and on what it is fixed to. Choosing the right size and type of fitting for the job is the customer's responsibility. If in doubt, ask us.