
173F Female Single Swivel

Key clamp fitting for tubular handrails, barriers and frames

Tube sizes
27mm · 34mm · 42mm · 48mm · 60mm

The female half of the 173 Single Swivel.

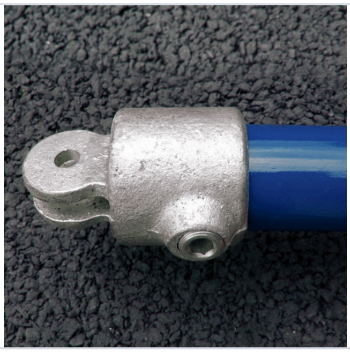

Dimension drawing to follow.
Sizes, weights and part numbers are in the table below.

SIZES AND DATA

		27mm A27	34mm B34	42mm C42	48mm D48	60mm E60
Part number		**173F-A27**	**173F-B34**	**173F-C42**	**173F-D48**	**173F-E60**
Fits tube	outside diameter, mm (nominal bore)	26.9 (3/4")	33.7 (1")	42.4 (1 1/4")	48.3 (1 1/2")	60.3 (2")
FIXING AND WEIGHT						
Grub screw	BSP thread × length, mm	1/4" × 12.5	1/4" × 12.5	3/8" × 12.7	3/8" × 12.7	3/8" × 12.7
Hex key	across flats	1/4" AF	1/4" AF	5/16" AF	5/16" AF	5/16" AF
Weight	kg, approximate	0.22	0.32	0.42	0.49	0.72
OTHER MAKERS' PART NUMBERS for comparison						
Kee Klamp		F50-5	F50-6	F50-7	F50-8	–
Interclamp		173F-A27	173F-B34	173F-C42	173F-D48	173F-E60
Q Clamp		173F-1	173F-2	173F-3	173F-4	173F-5
Tubeclamp		173FA	173FB	173FC	173FD	173FE
FastClamp		C36G20	C36G25	C36G32	C36G40	C36G50
Alvin		A42 size 5	A42 size 6	A42 size 7	A42 size 8	A42 size 9
ORDERING						
Barcode	GTIN	5061091711874	5061091711881	5061091711898	5061091711904	5061091711911

Material: Malleable cast iron (ASTM A197) **Finish:** Hot-dip galvanised

Do not build a whole structure from swivel fittings alone. Sizes and weights are nominal figures from the foundry's data. These are galvanised castings, so individual fittings vary and it is normal for one to measure or weigh a little differently. Check the fittings in your hand before cutting tube or drilling fixing holes. Not for use as building or construction scaffolding. The strength of a structure depends on the fittings, tube and fixings chosen and on what it is fixed to. Choosing the right size and type of fitting for the job is the customer's responsibility. If in doubt, ask us.