
173M Male Single Swivel

Key clamp fitting for tubular handrails, barriers and frames

Tube sizes
27mm · 34mm · 42mm · 48mm · 60mm

The male half of the 173 Single Swivel.

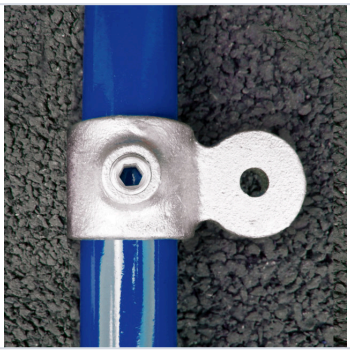

Dimension drawing to follow.
Sizes, weights and part numbers are in the table below.

SIZES AND DATA

		27mm A27	34mm B34	42mm C42	48mm D48	60mm E60
Part number		**173M-A27**	**173M-B34**	**173M-C42**	**173M-D48**	**173M-E60**
Fits tube	outside diameter, mm (nominal bore)	26.9 (3/4")	33.7 (1")	42.4 (1 1/4")	48.3 (1 1/2")	60.3 (2")
FIXING AND WEIGHT						
Grub screw	BSP thread × length, mm	1/4" × 12.5	1/4" × 12.5	3/8" × 12.7	3/8" × 12.7	3/8" × 12.7
Hex key	across flats	1/4" AF	1/4" AF	5/16" AF	5/16" AF	5/16" AF
Weight	kg, approximate	0.15	0.25	0.32	0.33	0.47
OTHER MAKERS' PART NUMBERS for comparison						
Kee Klamp		M50-5	M50-6	M50-7	M50-8	M50-9
Interclamp		173M-A27	173M-B34	173M-C42	173M-D48	173M-E60
Q Clamp		173M-1	173M-2	173M-3	173M-4	173M-5
Tubeclamp		173MA	173MB	173MC	173MD	173ME
FastClamp		C35G20	C35G25	C35G32	C35G40	C35G50
Alvin		A36 size 5	A36 size 6	A36 size 7	A36 size 8	A36 size 9
ORDERING						
Barcode	GTIN	5061091711829	5061091711836	5061091711843	5061091711850	5061091711867

Material: Malleable cast iron (ASTM A197) **Finish:** Hot-dip galvanised

Do not build a whole structure from swivel fittings alone. Sizes and weights are nominal figures from the foundry's data. These are galvanised castings, so individual fittings vary and it is normal for one to measure or weigh a little differently. Check the fittings in your hand before cutting tube or drilling fixing holes. Not for use as building or construction scaffolding. The strength of a structure depends on the fittings, tube and fixings chosen and on what it is fixed to. Choosing the right size and type of fitting for the job is the customer's responsibility. If in doubt, ask us.