

182 Hook

Key clamp fitting for tubular handrails, barriers and frames

Tube sizes
27mm · 34mm · 42mm · 48mm

Commonly used as a chain hook. Can also hold netting or advertising banners.

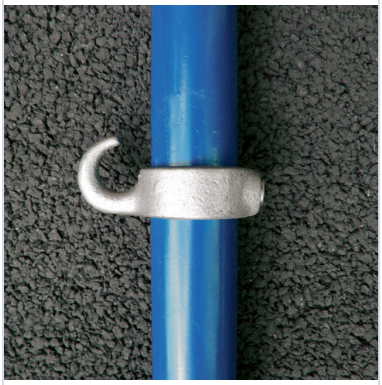

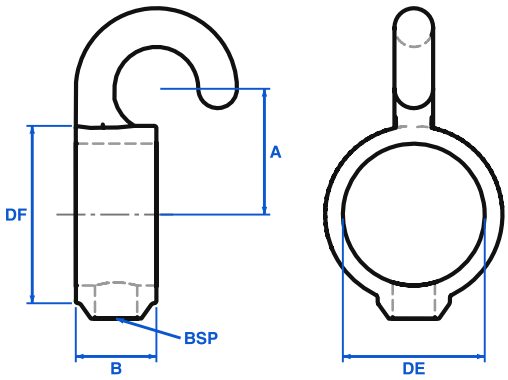

One drawing serves every size. Letters match the table below.

SIZES AND DATA

		27mm A27	34mm B34	42mm C42	48mm D48
Part number		**182-A27**	**182-B34**	**182-C42**	**182-D48**
Fits tube	outside diameter, mm (nominal bore)	26.9 (3/4")	33.7 (1")	42.4 (1 1/4")	48.3 (1 1/2")
DIMENSIONS	nominal, mm, as lettered on the drawing				
A	collar axis to the centre of the hook's curve	32	34	39	41
B	collar width (along the tube)	25	25	25	25
DE	bore (inside diameter of the socket, the tube passes in here)	28	35	44	50
DF	outside diameter of the cast body	38	46	55	60.5
FIXING AND WEIGHT					
Grub screw	BSP thread × length, mm	1/4" × 12.5	1/4" × 12.5	3/8" × 12.7	3/8" × 12.7
Hex key	across flats	1/4" AF	1/4" AF	5/16" AF	5/16" AF
Weight	kg, approximate	0.16	0.18	0.20	0.21
OTHER MAKERS' PART NUMBERS	for comparison				
Kee Klamp		76-5	76-6	76-7	76-8
Interclamp		182-A27	182-B34	182-C42	182-D48
Q Clamp		182-1	182-2	182-3	182-4
Tubeclamp		182A	182B	182C	182D
FastClamp		C33G20	C33G25	C33G32	C33G40
Alvin		A64 size 5	A64 size 6	A64 size 7	A64 size 8
ORDERING					
Barcode	GTIN	5061091712017	5061091712024	5061091712031	5061091712048

Material: Malleable cast iron (ASTM A197) **Finish:** Hot-dip galvanised

Sizes and weights are nominal figures from the foundry's data. These are galvanised castings, so individual fittings vary and it is normal for one to measure or weigh a little differently. Check the fittings in your hand before cutting tube or drilling fixing holes. Not for use as building or construction scaffolding. The strength of a structure depends on the fittings, tube and fixings chosen and on what it is fixed to. Choosing the right size and type of fitting for the job is the customer's responsibility. If in doubt, ask us.