
146 Side Palm Fixing

Key clamp fitting for tubular handrails, barriers and frames

Tube sizes
34mm · 42mm · 48mm

Fixes railing flush to a wall, steps or ramps. The flush design lets posts sit tight to the structure.

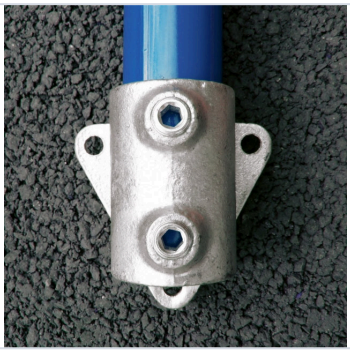

Dimension drawing to follow.
Sizes, weights and part numbers are in the table below.

SIZES AND DATA

		34mm B34	42mm C42	48mm D48
Part number		**146-B34**	**146-C42**	**146-D48**
Fits tube	outside diameter, mm (nominal bore)	33.7 (1")	42.4 (1 1/4")	48.3 (1 1/2")
FIXING AND WEIGHT				
Grub screw	BSP thread × length, mm	1/4" × 12.5	3/8" × 12.7	3/8" × 12.7
Hex key	across flats	1/4" AF	5/16" AF	5/16" AF
Weight	kg, approximate	0.55	0.76	0.83
OTHER MAKERS' PART NUMBERS for comparison				
Kee Klamp		68-6	68-7	68-8
Interclamp		146-B34	146-C42	146-D48
Q Clamp		146-2	146-3	146-4
Tubeclamp		146B	146C	146D
FastClamp		C15G25	C15G32	C15G40
Alvin		A15 size 6	A15 size 7	A15 size 8
ORDERING				
Barcode	GTIN	5061091710907	5061091710914	5061091710921

Material: Malleable cast iron (ASTM A197) **Finish:** Hot-dip galvanised

Sizes and weights are nominal figures from the foundry's data. These are galvanised castings, so individual fittings vary and it is normal for one to measure or weigh a little differently. Check the fittings in your hand before cutting tube or drilling fixing holes. Not for use as building or construction scaffolding. The strength of a structure depends on the fittings, tube and fixings chosen and on what it is fixed to. Choosing the right size and type of fitting for the job is the customer's responsibility. If in doubt, ask us.